


Flexco Microwave, Inc.

PO Box 115, 17 Karrville Road
Port Murray, NJ 07865
Telephone 908-835-1720
Fax 908-835-0002
E-mail sales@flexcoMW.com
http://www.FlexcoMW.com




S372 Flexible Coaxial Cable
9.5 GHz Cable

Frequency vs. Attenuation

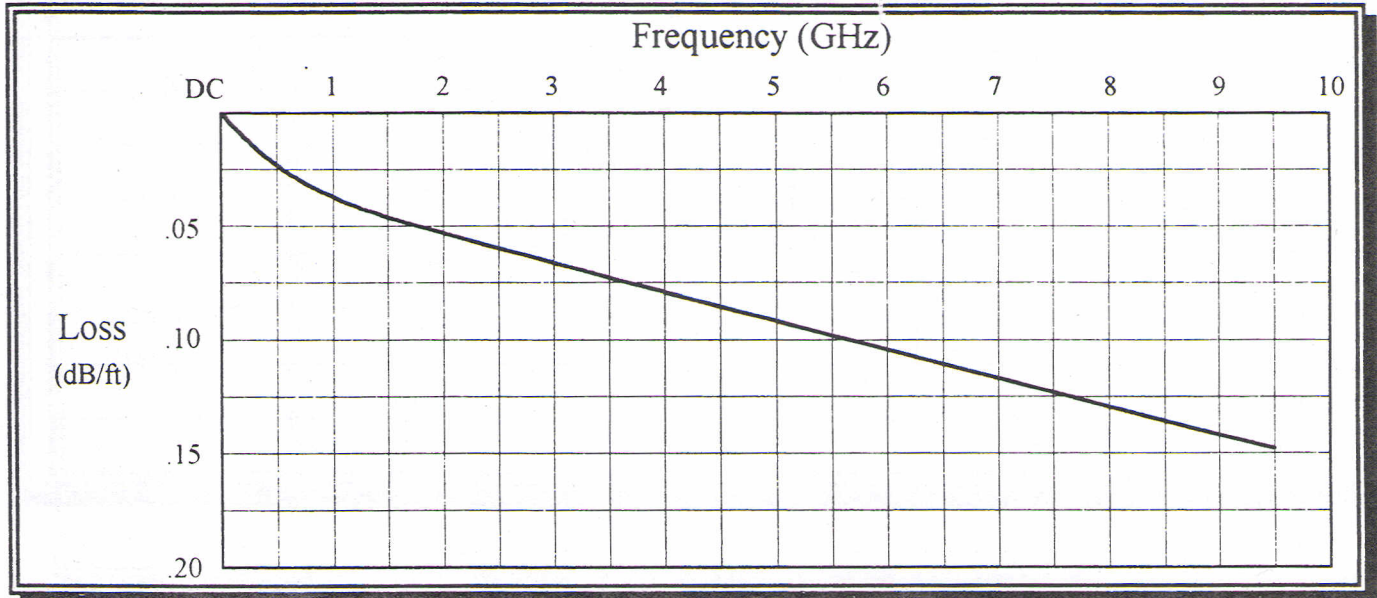

Frequency (GHz)	Typical Insertion Loss (dB/ft)	Typical Connector Loss (dB/each)	Average Power at 40°C (kW)
0.03	0.0056	0.02	3.50
0.4	0.022	0.02	0.83
1.0	0.036	0.02	0.52
2.0	0.055	0.03	0.34
4.0	0.080	0.04	0.22
6.0	0.115	0.06	0.18
8.0	0.135	0.07	0.15
9.5	0.145	0.08	0.12

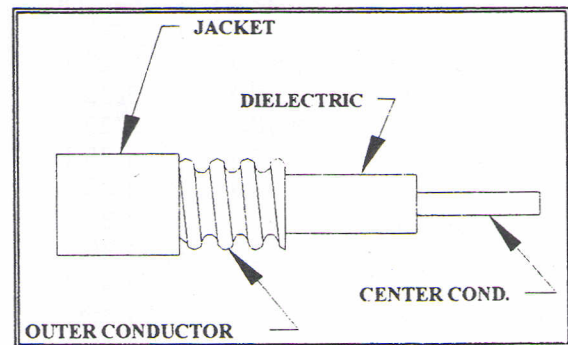

Electrical Characteristics:

Nominal Impedance: 50Ω
Velocity of Propagation: 81%
Effective Dielectric Constant: 1.52
Time Delay: 1.25 ns/ft
Shielding Effectiveness: -110 dBc min.
Dielectric Withstanding Voltage: 5.0 KV
(@ 60 Hz, Sea Level/25°C)
Nominal Capacitance: 25 pF/ft
Maximum Frequency: 9.5 GHz

Physical Characteristics:

Center Conductor: Solid, copper clad aluminum
Dielectric: Closed cell polyethylene foam
Outer Conductor: Seamless, corrugated copper
0.480" nominal O.D.
Jacket: Black polyethylene, 0.530" nominal O.D.
Minimum Internal Bend Radius: 1.25 inches
Operating Temperature: -40°C to +85°C
Weight per Foot: 0.15 lbs.
Connector Interface: Per MIL-C-39012