



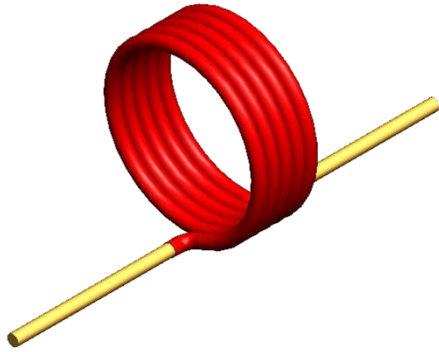

MK Series Copper High Frequency Air Coils

ET Tect Electronics
A High Quality Components Supplier



- Micro Sized Gold Plated Copper Air Coils
- Inductance Values From 8 nH
- Precision Insulation Removal For Repeatabile Mounting
- Extremely Low Insertion Loss
- Perfect for High Frequency Filters

MK Series Inductor Specification


Part Number	L (nH) +/-10%	Q Min	I Max (mA)	SRF Typ. (GHz)	Test Freq. (MHz)	DCR Max (Ohms)	Length Nom. (Inches)	Wire Size (AWG)	Turns
MK3T47.018HXS-00	8	26	100	10.0	200	0.25	0.005	47	3
MK5T47.018HXS-00	15	29	100	9.0	200	0.30	0.010	47	5
MK10T47.018HXS-00	35	23	100	7.5	100	0.50	0.017	47	10
MK15T47.018HXS-00	60	24	100	6.0	100	0.65	0.026	47	15
MK20T47.018HXS-00	85	25	100	4.5	100	0.80	0.034	47	20
MK30T47.018HXS-00	140	17	100	2.5	25	1.10	0.050	47	30

Custom configurations available upon request - Contact Piconics for more info.

*SRF is Typical Performance on 10 mil Alumina

Mechanicals:

Wire	47 Awg Copper
Insulation	240°C Polyimide-Amide
Lead Finish	5-10 Micro Inch Gold Plate
Packaging	Individual Pill Capsules

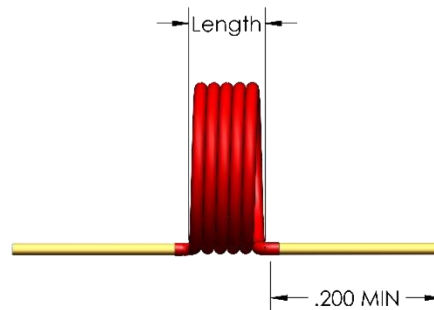

Environmental:

Operating Temp.	-55°C to 125°C
Storage Temp.	-55°C to 125°C
RoHS Compliant	Yes



Not Drawn To Scale
Dimensions in Inches



香港: 00852-23337679
上海: 021-58789565
北京: 010-65671568
深圳: 0755-83278151
成都: 028-86283610

sales@tect.com.hk
salesSH@tect.com.cn
salesBJ@tect.com.cn
salesSZ@tect.com.cn
salesCD@tect.com.cn



www.tect-electronics.com